


銅線用裸圧着端子 角先開形端子 (F形)

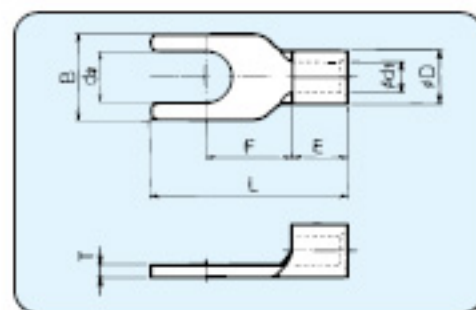

RoHS指令対応品

規格	印	呼び	各部の寸法								適合電線範囲			適合工具	一箱入数
			d _s	B	L	F	E	φD	φd _s	T	単線mm	撚線mm	AWG		
UL	●	F0.3-2	2.2	5.2	12.5	5.9	4.0	2.3	0.8	0.65	0.32	0.1	26-24	*DS031 *DH-1B *DS-A5	1,000 (100×10)
UL	●	F0.3-3	3.2												
	●	F0.3-V3.5	3.7	5.7	15.0	7.7	4.0	2.3	0.8	0.65	0.32	0.1	26-24	*DS031 *DH-1B *DS-A5	1,000 (100×10)
	●	F0.3-L3.5													
UL	●	F0.3-3.5	4.3	6.6	15.0	7.7	4.0	2.3	0.8	0.65	0.32	0.1	26-24	*DS031 *DH-1B *DS-A5	1,000 (100×10)
UL	●	F0.3-4													
UL	●	F0.5-2	2.2	5.2	12.5	5.9	4.0	2.3	1.2	0.5	0.5	0.2	24-20	*DS031 *DH-1B *DS-A5	1,000 (100×10)
UL	●	F0.5-3	3.2												
	●	F0.5-V3.5	3.7	5.7	15.0	7.7	4.0	2.3	1.2	0.5	0.5	0.2	24-20	*DS031 *DH-1B *DS-A5	1,000 (100×10)
	●	F0.5-L3.5													
UL	●	F0.5-3.5	4.3	6.6	15.0	7.7	4.0	2.3	1.2	0.5	0.5	0.2	24-20	*DS031 *DH-1B *DS-A5	1,000 (100×10)
UL	●	F0.5-4													
UL	●	F0.5-5	5.3	8.0	15.0	7.0	4.0	2.3	1.2	0.5	0.5	0.2	24-20	*DS031 *DH-1B *DS-A5	1,000 (100×10)
UL	●	F1.25-M3	3.2	5.6	14.2	5.0									
UL	●	F1.25-3	3.2	6.0	14.2	4.4	4.5	3.4	1.7	0.8	0.57	0.25	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34S	1,000 (100×10)
	●	F1.25-V3													
UL	●	F1.25-L3	3.7	6.0	12.8	4.5	4.5	3.4	1.7	0.8	0.57	0.25	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34S	1,000 (100×10)
UL	●	F1.25-C3.5													
UL	●	F1.25-S3.5	3.7	6.0	14.2	4.4	4.5	3.4	1.7	0.8	0.57	0.25	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34S	1,000 (100×10)
UL	●	F1.25-3.5													
UL	●	F1.25-V3.5	4.3	5.9	15.6	6.5	4.5	3.4	1.7	0.8	1.44	1.65	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34S	1,000 (100×10)
UL	●	F1.25-L3.5													
UL	●	F1.25-A3.5	4.3	6.4	15.6	6.8	4.5	3.4	1.7	0.8	1.44	1.65	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34S	1,000 (100×10)
UL	●	F1.25-S4													
UL	●	F1.25-4	4.3	8.3	16.2	7.1	4.5	3.4	1.7	0.8	1.44	1.65	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34S	1,000 (100×10)
UL	●	F1.25-A4													
UL	●	F1.25-5	5.3	8.0	16.8	7.0	4.5	3.4	1.7	0.8	1.44	1.65	22-16	*DS031 *DS-H12 *DS-H18 *DH-1B *DS-A5 *DS-Hi34S	1,000 (100×10)
UL	●	F1.25-6	6.4	9.7	17.0	7.6									
UL	●	F2-3	3.2	5.5	14.2	4.4	4.5	4.2	2.3	0.8	1.14	1.04	16-14	*DS-H12 *DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14 *DS-Hi34S	1,000 (100×10)
	●	F2-A3	3.7	5.7	15.7	6.5									
UL	●	F2-S3.5	3.7	6.5	15.8	6.0	4.5	4.2	2.3	0.8	1.14	1.04	16-14	*DS-H12 *DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14 *DS-Hi34S	1,000 (100×10)
UL	●	F2-3.5													
UL	●	F2-M4	4.3	6.6	15.8	8.0	4.5	4.2	2.3	0.8	1.82	2.63	16-14	*DS-H12 *DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14 *DS-Hi34S	1,000 (100×10)
UL	●	F2-S4													
UL	●	F2-4	4.3	8.3	16.2	7.2	4.5	4.2	2.3	0.8	1.82	2.63	16-14	*DS-H12 *DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14 *DS-Hi34S	1,000 (100×10)
UL	●	F2-A4													
UL	●	F2-5	5.3	8.5	17.2	8.5	4.5	4.2	2.3	0.8	1.82	2.63	16-14	*DS-H12 *DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14 *DS-Hi34S	1,000 (100×10)
UL	●	F2-6	6.4	11.0	20.2	9.5									
UL	●	F3.5-4	4.3	8.0	17.8	7.5	6.3	5.6	3.4	1.0	1.82	2.63	12-10	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14	500 (100×5)
UL	●	F3.5-5	5.3	8.0	17.8	7.5									
UL	●	F5.5-M4	4.3	7.1	19.5	7.9	6.3	5.6	3.4	1.0	1.82	2.63	12-10	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14	500 (100×5)
UL	●	F5.5-4													
UL	●	F5.5-5	5.3	9.0	19.0	8.5	6.3	5.6	3.4	1.0	2.89	6.64	12-10	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14	500 (100×5)
UL	●	F5.5-6													
UL	●	F5.5-8	8.4	15.0	24.5	10.5	6.3	5.6	3.4	1.0	2.89	6.64	12-10	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14	400 (80×4)
UL	●	F5.5-8	8.4	15.0	24.5	10.5									

1. 各呼びの印は、UL登録品、CSA登録品です。
 2. CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
 3. 上記寸法表にかかわらず特注品もご相談ください。
 4. *印はUL適合工具です。5. ●印は曲げ加工可能製品です。ただし、一部の製品については角度の制限がありますので、ご相談ください。