
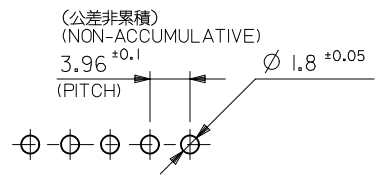
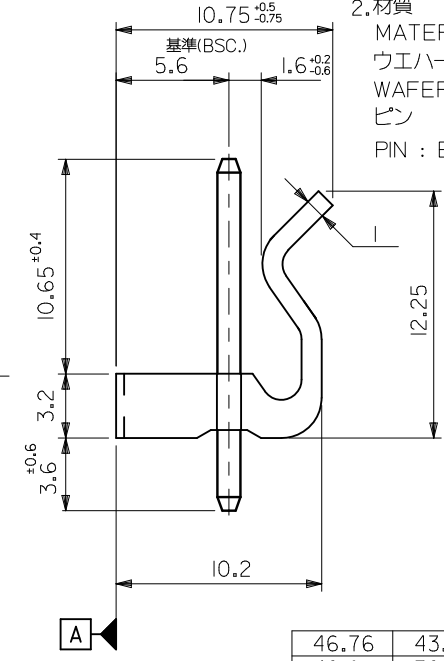


注記  
NOTES

△全極数が偶数の場合のみ適用。  
TO BE APPLIED ONLY WHEN ALL CKTS ARE EVEN.

2.材質  
MATERIAL  
ウエハー : 66ナイロン, UL 94V-2  
WAFER : 66NYLON, UL-94V-2  
ピン : 黄銅, 銅下地錫メッキ (□1.14X17.45)  
PIN : BRASS, TIN OVER COPPER PLATING (□1.14X17.45)

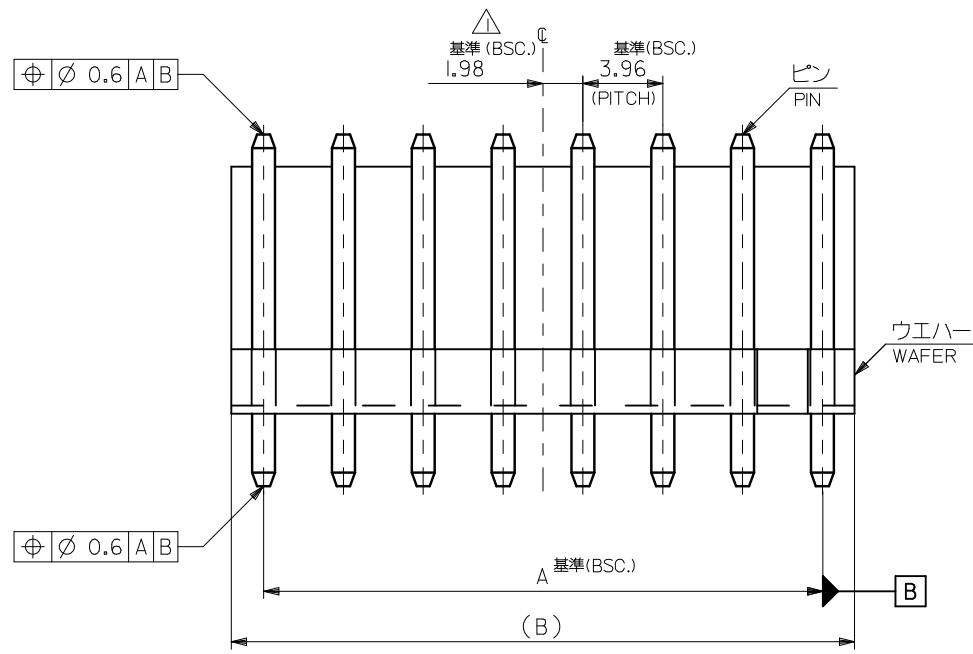

基板取付穴推奨寸法  
RECOMMENDED P.C.BOARD HOLE DIM.

46.76	43.56	09-65-2128	5273-12A	12
42.8	39.6	▲ -2118	▲ -11A	11
38.84	35.64	▲ -2108	▲ -10A	10
34.88	31.68	▲ -2098	▲ -09A	9
30.92	27.72	▲ -2088	▲ -08A	8
26.96	23.76	▲ -2078	▲ -07A	7
23	19.8	▲ -2068	▲ -06A	6
19.04	15.84	▲ -2058	▲ -05A	5
15.08	11.88	▲ -2048	▲ -04A	4
11.12	7.92	▼ -2038	▼ -03A	3
7.16	3.96	09-65-2028	5273-02A	2
B	A	オーダー番号 (EDP NO.) ORDER NO. (EDP NO.)	ENG. NO.	極数 CKTS

REVISED EC NO.: J2009-2884 DRWN: YSHIBATA 2009/06/23 CHKD: THARUYAMA 2010/03/15 APPR: NUKITA 2010/03/15	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
	10 UNDER	±0.2	DRAWN BY S. MOCHIZUKI	DATE 1989/05/12	TITLE KK 3.96 WAFER ASSY WITH LOCK					
	10 OVER 30 UNDER	±0.25	CHECKED BY H.H.	DATE 1991/04/10	MOLEX INCORPORATED					
	30 OVER	±0.3	APPROVED BY M. ENOMOTO	DATE 1991/04/10	DOCUMENT NO. SD-5273-001					
REV	DESCRIPTION	ANGULAR ±3 °	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		SHEET NO. 1 OF 1			